

EXTERIOR

*Rubio*<sup>®</sup>  
MONOCOAT

**MAINTENANCE INSTRUCTIONS**  
Hybrid Wood Protector

EN

# CLEANING

How do I keep my exterior wood clean?

FOR SMALLER SURFACES




FOR LARGER SURFACES



EXTERIOR SOAP ECOSPRAY

EXTERIOR SOAP

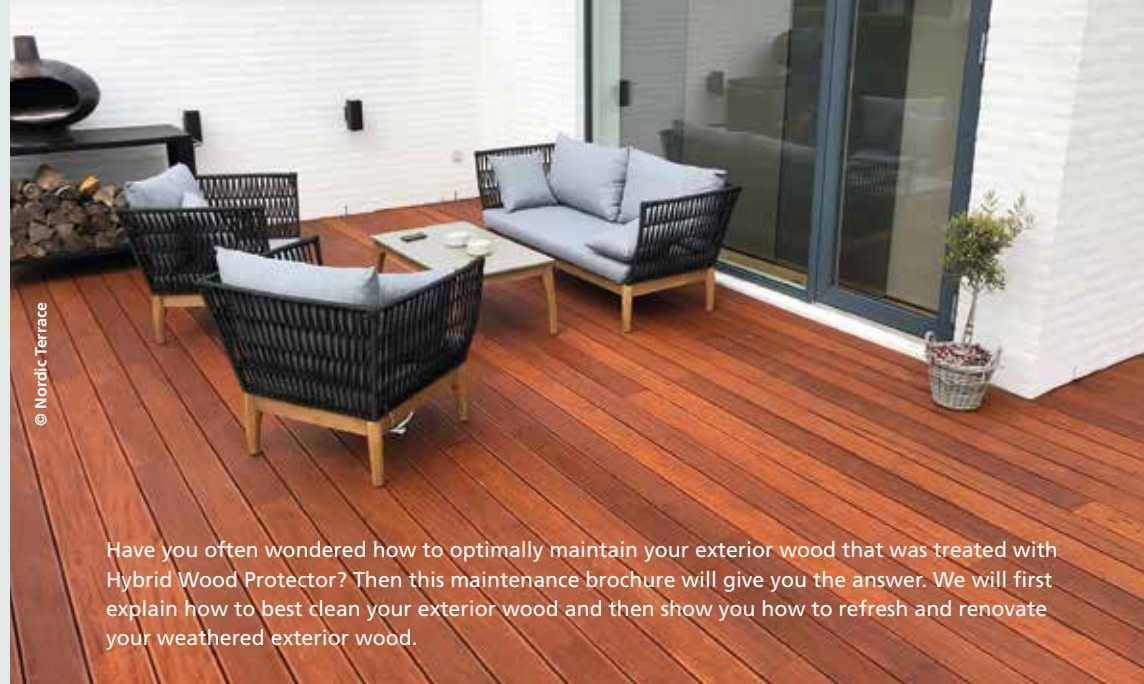

Have you often wondered how to optimally maintain your exterior wood that was treated with Hybrid Wood Protector? Then this maintenance brochure will give you the answer. We will first explain how to best clean your exterior wood and then show you how to refresh and renovate your weathered exterior wood.

## EXTERIOR SOAP

**Ecological soap with cleaning and nourishing effect**

Exterior Soap is a soap with a cleaning and nourishing action. This product is used to clean external wooden surfaces, which have been treated with an oil from the Rubio Monocoat exterior assortment. The soap is suitable for intermediate cleaning.

### INSTRUCTIONS:

01. Make the wooden surface wet.
02. Shake the bottle to obtain a homogeneous mixture.
03. Pour 1 litre of Rubio Monocoat Exterior Soap into a bucket. Add 3 litres of clear water.
04. Clean the surface with a mop or a lint-free cloth.
05. Allow to dry for approximately 30 minutes.



## EXTERIOR SOAP ECOSPRAY

**Ready-to-use spray of our ecological soap with cleaning and nourishing effect**

Exterior Soap Ecospray is the handy, ready-to-use version of Exterior Soap. This spray is suitable for cleaning smaller surfaces. The empty spray bottle can be refilled with Exterior Soap after use. This is both useful and ecological.

### INSTRUCTIONS:


01. Make the wooden surface wet.
02. Shake the bottle to obtain a homogeneous mixture.
03. Spray the product onto the surface.
04. Clean the surface with a mop or a lint-free cloth.
05. Allow the surface to dry for approximately 30 minutes.

### HOW TO REFILL THE SPRAY:

Pour 150 ml Rubio Monocoat Exterior Soap into the spray and fill up to 500 ml with clear water.



## REFRESH & RENOVATE

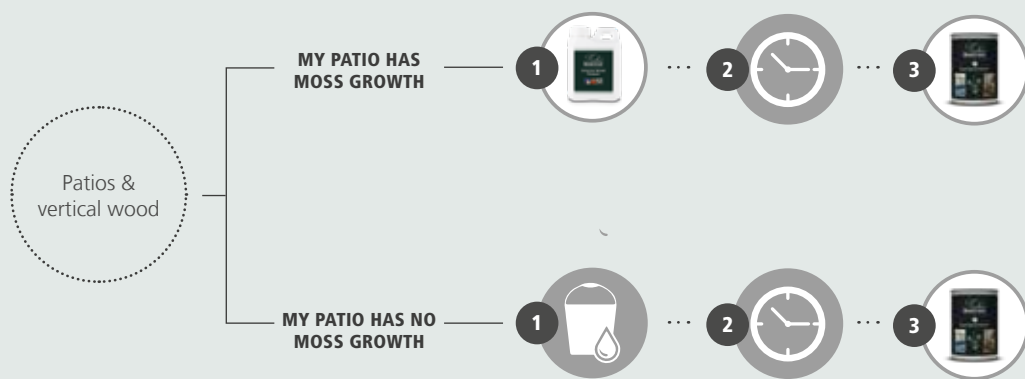

### WHEN?

#### PATIOS:

Maintenance of your patio needs to be done **annually**.

#### VERTICAL WOOD:

- **1st maintenance:** generally *after 1 year*
- **Further maintenance:** *every 3 to 5 years*



EXTERIOR  
WOOD CLEANER



ALLOW TO DRY



HYBRID WOOD  
PROTECTOR



CLEAN WET  
with water

## EXTERIOR WOOD CLEANER

### Efficient cleaner for exterior wood

Exterior Wood Cleaner is a preparatory cleaner for all types of exterior wood (wooden patios, fences, exterior doors, carports, terraces, etc.) and composite. The product removes grey discoloration, green deposits and dirt. That way, your exterior wood will be as good as new again!

#### INSTRUCTIONS:

**01.** Dampen the surface with water. Use a garden hose. **02.** Apply some undiluted Exterior Wood Cleaner. **03.** Scrub the treated area with a nylon scrubbing brush in the lengthwise direction of the wood until it is clean. This will cause the product to foam. For stubborn stains, repeat the treatment. **04.** Rinse thoroughly with water until all the foam has disappeared. **05.** Allow the surface to dry well until it looks and feels dry (± 30 minutes with a temperature of 20 °C and a good ventilation). **06.** Treat with the Rubio Monocoat exterior wood protection product of your choice.



## HYBRID WOOD PROTECTOR

### Colours and protects exterior wood in one layer

Was your wood treated with Hybrid Wood Protector and do you now want to refresh its colour and protect it optimally again? Then you can use the same product again in the original colour. Sanding is not necessary!

#### INSTRUCTIONS:

**01.** Clean with clear water if the wood has no moss growth. Clean with Exterior Wood Cleaner if the wood is suffering from moss growth. **02.** Allow the surface to dry. **03.** Mix the oil thoroughly before application. Apply a layer Hybrid Wood Protector with a flat brush or the Brush Standard 220. **04.** Allow about 10 minutes to react. Then remove any excessive oil by smoothing the surface with the same brush (without adding new product).



#### ATTENTION

##### SPONTANEOUS COMBUSTION

Linseed oil is a natural product and not subject to spontaneous combustion. However, oil on a cloth or other tools does entail a fire risk. The oxidation of the oil leads to heat accumulation, which can result in spontaneous combustion. Therefore, the cloths and other tools must be soaked in water before disposal.

#### TIPS:

The frequency of maintenance of vertical wood can differ from project to project. Depending on the wood type, the colour of the oil and the location, maintenance will be required sooner for some than for others. Patios should have maintenance every year.







© Breithenthaler, Austria



© Extremis, Belgium




© Private residence, Belgium



© Villa Foresta, La Réunion

Name of your custom-made colour: \_\_\_\_\_

Date of application: \_\_\_\_\_

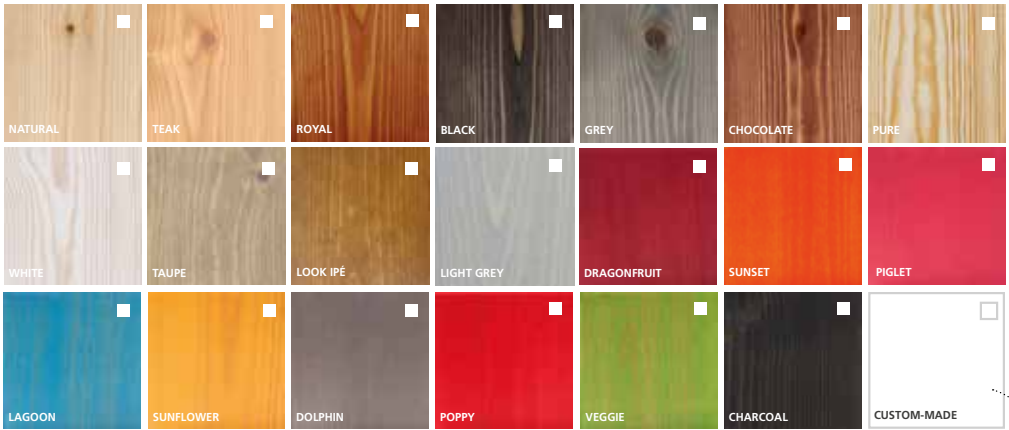

Name of your custom-made colour: \_\_\_\_\_

### Maintenance calendar:

When was your wood treated? \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_

Maintenance 1: \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_ Maintenance 2: \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_

Maintenance 3: \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_ Maintenance 4: \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_

Further maintenance: \_\_\_\_\_

Your installer/distributor:

