

## Universal Maintenance Oil

Universal maintenance oil for a refreshing look

Universal Maintenance Oil is a maintenance oil for refreshing wood treated with Rubio Monocoat oil, as well as for maintaining surfaces not treated with Rubio Monocoat. The oil is extremely suitable for 'high traffic' areas that require regular protection (e.g. public areas, offices, restaurants, hotels, etc.).

Universal Maintenance Oil is available in the colours 'Pure', 'White' and 'Black', to be chosen depending on the colour of the surface to be treated.



### PRODUCT INFORMATION

#### › Specific characteristics

- Universal use
- Provides a renewed protection
- Restores the luster
- 0% VOC


#### › Technical characteristics

- Physical state at 20°C: liquid
- Basis: mixture of natural oils
- Density: 0.93 - 1.4 g/cm<sup>3</sup>
- Flash point: > 65°C
- VOC content: 0 g/L

<b>DRYING TIME</b>	6 - 8 h
<b>CURING TIME</b>	5 - 7 days
<b>APPLICATION INFORMATION</b>	All already treated wooden surfaces indoors
<b>CONSUMPTION</b>	0,5 litre = 75-100 m <sup>2</sup>
<b>WORKING TEMPERATURE</b>	8 - 30 °C
<b>HUMIDITY APPLICATION RANGE</b>	40 - 60%
<b>STORAGE</b>	The product can be stored for up to 12 months. Store in dry conditions and in the original packaging. Keep away from frost.
<b>CLEANING</b>	At the earliest after 48 hours with a damp cloth. After 7 days with All Natural Wood Cleaner, All Natural Wood Cleaner Spray, Universal Soap or Surface Care.
<b>REMARKS</b>	Use very little product to prevent the surface from becoming sticky. Ensure adequate ventilation.

\* These usages are merely indicative. Results depend on wood type and method of preparation. It is always recommended to make a sample in order to calculate the exact usage.

## › Packaging



## APPLICATION INFORMATION

### > Instructions

#### > Furniture, stairs & worktops

**STEP 1.** Make the surface free of dirt and dust.

**STEP 2.** Spray Surface Care on the surface.

**STEP 3.** Clean the surface with a mop or Microfibre Pad.

**STEP 4.** Let the surface dry ( $\pm$  15 minutes). Careful: do not leave water on the surface, it is sufficient to clean damp. Do not walk on the floor until it is completely dry.

**STEP 5.** Take the Universal Maintenance Oil and stir thoroughly until a homogeneous mixture is obtained.

**STEP 6.** Apply a small amount of oil with a brush and afterwards spread out with a beige or red Scrubby pad or a hand sander with a small beige or red 5.9 inch pad (you can also use the Mouse Pad for smaller objects and corners). Preferably work in areas of 2 to 4 m<sup>2</sup> (areas which you can finish within  $\pm$  15 minutes, including the next step).

**STEP 7.** Allow to absorb for a few minutes and then wipe away all the excess oil with a cloth or a hand sander with a small white 5.9 inch pad. Each treated area should be wiped dry within 15 minutes and should not feel sticky anymore.

#### > Floors

**STEP 1.** Make the floor free of dirt and dust.

**STEP 2.** Pour a maximum of 50 to 100 ml of Universal Soap in a bucket with 10 litres of water.

**STEP 3.** Clean the surface with a mop or Microfibre Pad.

- Tip: The best working method is with two buckets: one with the soap mixture and one with clean water to rinse the dirt out of the mop.

**STEP 4.** Rinse with clean water. Careful: do not leave water on the surface, it is sufficient to clean damp.

**STEP 5.** Allow to dry for  $\pm$  15 minutes. Do not walk on the floor until it is completely dry.

**STEP 6.** Take the Universal Maintenance Oil and stir thoroughly until a homogeneous mixture is obtained.

**STEP 7.** Work in areas of 5 to 10 m<sup>2</sup>. Start each area by treating the edges with a beige or red Scrubby pad. Then apply a small amount of Universal Maintenance Oil every 0.5 metres with a brush. Spread in the direction of the wood with a polisher with a beige or red 16 inch pad.

**STEP 8.** Wipe away all the excess oil with a cloth or a polisher with a white 16 inch pad.

**STEP 9.** After you have finished all the areas, go over them again with a new white pad. The surface should not feel sticky anymore.

### › Tips & Tricks

- Stir the product well before applying.
- When using several units on one site, it is recommended to mix them to obtain an even result.
- Maintenance with Oil Plus 2C in the original colour is recommended as soon as the treated surface begins to show excessive wear or the colour needs to be refreshed.



### WARNING

Cloths and other application tools, saturated with oil, may spontaneously combust. After usage, immerse them in water and leave them for a while before disposing of them.


### REMARK

The product may not be diluted in any case!

### INFORMATIONAL

Adhesion according to DIN EN ISO 2409: classification 0

### › Related products

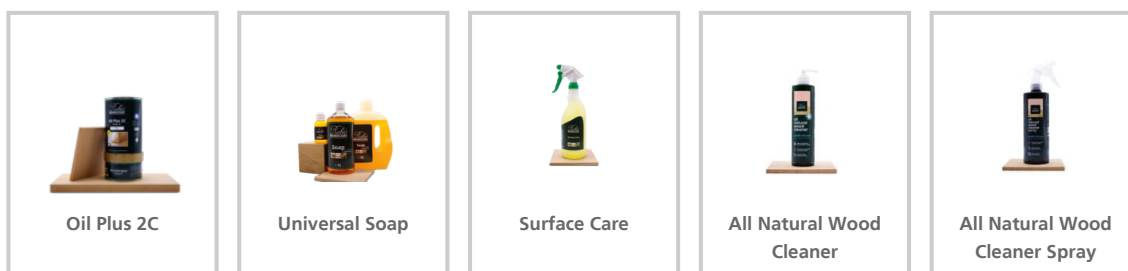

### › Certificates



Check the packaging and the safety data sheet for more details.

For our complete assortment of products for the protection and colouring of interior and exterior wood, please visit [www.rubimonocoat.com](http://www.rubimonocoat.com)

**LIABILITY:** It is the user's responsibility to establish, through his own tests, whether the product is suitable for the chosen application. In no case can Muylle Facon NV be held liable for any consequential damage. The information above may be subject to changes, which will be published in the updated versions of the technical data sheet. We cannot be held liable for poor results due to causes that are not related to the quality of the product. This technical information has been drawn up based on the currently available information and knowledge. The most recent technical data sheets can be requested or are available on the website. **Date of TDS: 08/02/2024. Check the safety information before using the product.**



# Rubio<sup>®</sup> MONOCOAT

MUYLLE  FACON

**Muylle Facon NV**

Ambachtenstraat 58  
8870 Izegem (BELGIUM)

Phone +32 (0) 51 30 80 54

Fax +32 (0) 51 30 99 78

info@muyllefacon.be

[www.rubimonocoat.com](http://www.rubimonocoat.com)